


AMPHIRION DEEP



**Infrapopliteal OTW + RX
PTA Balloon Catheter**

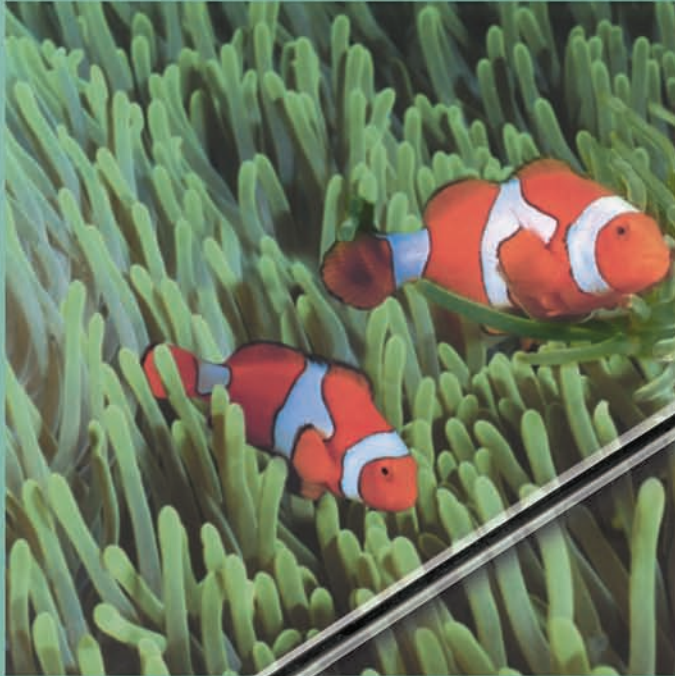

GO DEEP




INVATEC
Innovative Technologies

We make ideas come alive



AMPHIRION DEEP

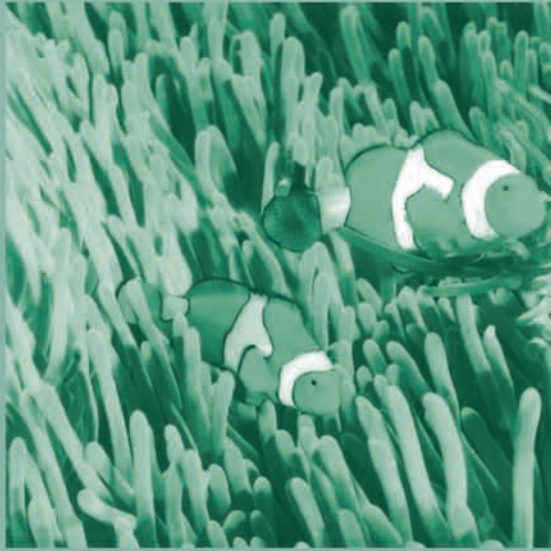


Technical Specifications

Catheter Design	Over the Wire (OTW)	Rapid Exchange (RX)
Balloon Material	FLEXITEC™ Ultra	
Coating	Balloon and distal shaft LFC Hydrophilic	
Shaft diameter	Proximal 3.3 F for 120 cm shaft length 3.9 F for 150 cm shaft length Middle 3.3F Distal 2.8 F	Proximal 2.0F Distal 3.3F
Introducer Sheath compatibility	4F	4F
Guiding Catheter compatibility	-	5F (I.D. >0.056")
Max. recommended Guidewire	0.014"	
Nominal Pressure	7 bar	

1 French (F) = 0.333 mm - 1 inch (") = 25.4 mm


OTW - Ref. N° 120 cm Shaft Length	OTW - Ref. N° 150 cm Shaft Length	RX - Ref. N° 150 cm Shaft Length	Balloon Ø (mm)	Balloon Length (mm)	Markers	RBP (bar)
AMD 015 020 001	AMD 015 020 151	-	1,50	20	1	14
AMD 015 020 002	AMD 015 020 152	-	1,50	20	2	14
AMD 020 040 002	AMD 020 040 152	AMD 020 040 RX2	2,00	40	2	15
AMD 020 080 002	AMD 020 080 152	AMD 020 080 RX2	2,00	80	2	14
AMD 020 120 002	AMD 020 120 152	AMD 020 120 RX2	2,00	120	2	14
AMD 020 150 002	AMD 020 150 152	AMD 020 150 RX2	2,00	150	2	14
AMD 025 040 002	AMD 025 040 152	AMD 025 040 RX2	2,50	40	2	16
AMD 025 080 002	AMD 025 080 152	AMD 025 080 RX2	2,50	80	2	15
AMD 025 120 002	AMD 025 120 152	AMD 025 120 RX2	2,50	120	2	14
AMD 025 150 002	AMD 025 150 152	AMD 025 150 RX2	2,50	150	2	14
AMD 030 040 002	AMD 030 040 152	AMD 030 040 RX2	3,00	40	2	16
AMD 030 080 002	AMD 030 080 152	AMD 030 080 RX2	3,00	80	2	15
AMD 030 120 002	AMD 030 120 152	AMD 030 120 RX2	3,00	120	2	14
AMD 030 150 002	AMD 030 150 152	AMD 030 150 RX2	3,00	150	2	14
AMD 035 040 002	AMD 035 040 152	AMD 035 040 RX2	3,50	40	2	16
AMD 035 080 002	AMD 035 080 152	AMD 035 080 RX2	3,50	80	2	15
AMD 035 120 002	AMD 035 120 152	AMD 035 120 RX2	3,50	120	2	14
AMD 035 150 002	AMD 035 150 152	AMD 035 150 RX2	3,50	150	2	14
AMD 040 040 002	AMD 040 040 152	AMD 040 040 RX2	4,00	40	2	16
AMD 040 080 002	AMD 040 080 152	AMD 040 080 RX2	4,00	80	2	15
AMD 040 120 002	AMD 040 120 152	AMD 040 120 RX2	4,00	120	2	14
AMD 040 150 002	AMD 040 150 152	AMD 040 150 RX2	4,00	150	2	14

- 1 Balloon inflation port
- 2 Guidewire port
- 3 Kink protection
- 4 Balloon length
- 5 Balloon diameter
- 6 Distal Balloon Diameter
- 7 Proximal Balloon Diameter

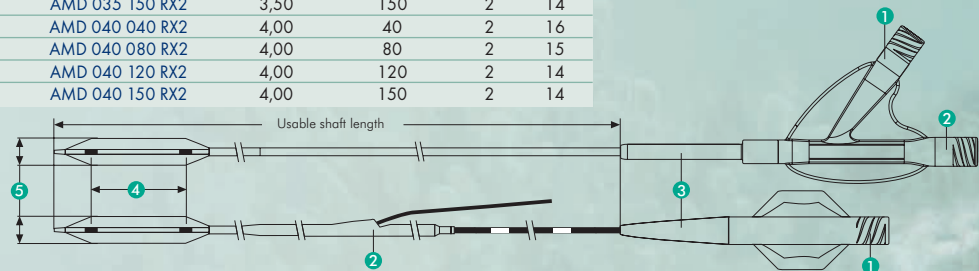

NEW AMPHIRION DEEP CONICAL BALLOON

Ref N° 120 cm Shaft Length	Ref N° 150 cm Shaft Length	Ref N° 150 cm Shaft Length	Balloon-Ø distal / proximal	Balloon Length	Marker	RBP (bar)
AMD225210002	AMD225210152	AMD 225 210 RX2	2,00 / 2,50	210	2	14
AMD253210002	AMD253210152	AMD 253 210 RX2	2,50 / 3,00	210	2	14
AMD335210002	AMD335210152	AMD 335 210 RX2	3,00 / 3,50	210	2	14
AMD354210002	AMD354210152	AMD 354 210 RX2	3,50 / 4,00	210	2	14

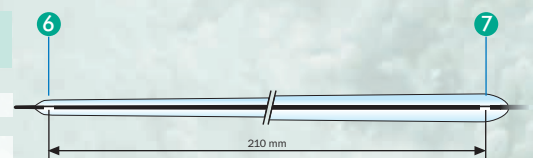

Global Sales & Marketing Office:
Invatec Technology Center GmbH - Hungerbühlstrasse 12 - 8500 Frauenfeld - Switzerland
Manufacturer & Global Headquarter:
Invatec S.p.A. - Via Martiri della Libertà, 7 - 25030 Roncadelle (BS) - Italy
www.invatec.com - info@invatec.com

Under continuous product development program, Invatec reserves the right to modify specifications without prior notice.



ISO 9001:2000 & EN ISO 13485:2003 Certified