

NEW
Wire

Verrata™
Pressure Guide Wire



Experience the Freedom of
**Untethered Steering—
from Tip to Clip**

Familiar Frontline Tip

- Industry standard flat-tip construction for easy tip shaping and tip shape retention
- Preformed J-shaped tip is always directed toward the sensor, guarding against whipping artifact

Quickly Disconnect and Reliably Reconnect

- New proximal wire design resists kinks and repels moisture
- New clip connector provides multiple back up contact points for a secure signal
- Verrata allows free wire rotation when connected



 **VOLCANO**
PRECISION GUIDED THERAPY


The QuickConnect™ Process



1. Angled Approach




2. Drag

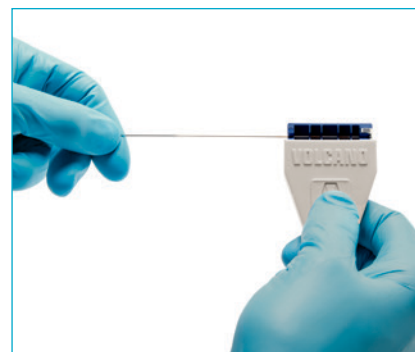

3. Drop

Technical Specifications

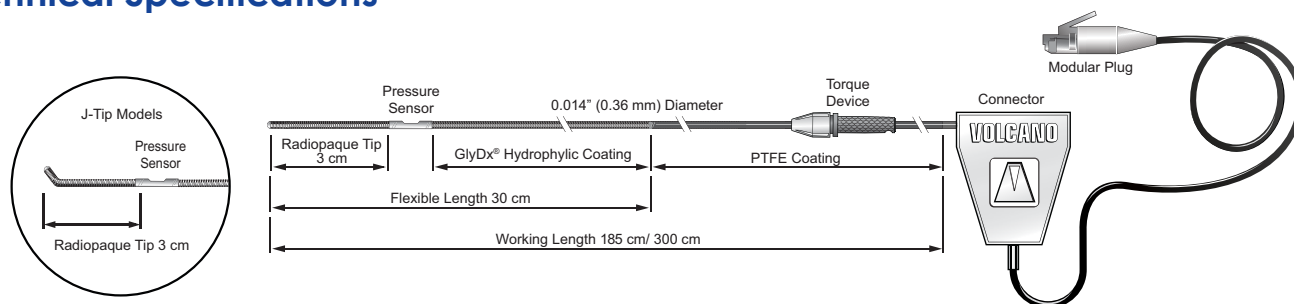

Verrata™ Pressure Guide Wire Ordering Information

Model	Length	Tip
10185	185 cm	Straight
10185J	185 cm	J-tip
10300	300 cm	Straight
10300J	300 cm	J-tip



Volcano Corporation
Corporate Headquarters
3721 Valley Centre Drive, Suite 500
San Diego, CA 92130 USA
Phone: 800-228-4728
Fax: 858-720-0325

Volcano Corporation
Manufacturing Headquarters
2870 Kilgore Road
Rancho Cordova, CA 95670 USA
Phone: 800-228-4728
Fax: 916-638-8812

Volcano Europe SPRL/BVBA
Europe Headquarters
Excelsiorlaan 41
B-1930 Zaventem Belgium
Phone: +32 2 679 1076
Fax: +32 2 679 1079

For further information about Volcano and its products, please visit www.volcanocorp.com.
Volcano, the Volcano logo, and GlyDx are registered trademarks of Volcano Corporation.
Verrata, AcuSense, and QuickConnect are trademarks of Volcano Corporation.